



CLOSED LOOP DRIVE ALONG WITH SLOPED TAIL FOR INCREASED LEVELING CAPABILITY.




THE LX877 COMBINES THE STABILITY OF A FULL TAIL SWING UPPER WITH A SLOPED TAIL FOR ENHANCED LEVELING CAPABILITY. CLOSED LOOP TRACK DRIVE SYSTEM FOR HIGHEST PERFORMANCE IN STEEP SLOPE FELLING APPLICATIONS.

KEY BENEFITS

- Unique sloping tail for improved leveling capability and increased cable assist chain clearance
- ▶ ER boom technology® improves fuel efficiency, reduces operator fatigue and increases productivity
- Extreme duty leveling undercarriage for excellent stability on steep slopes
- Power operated roof enclosure completely exposes the engine and major component while serving as a safe and convenient work platform

EXCELLENT OPERATOR COMFORT

• Full shift comfort. Highly adjustable parallel action air ride seat with integrated heating and cooling. Comfortable cab interior with clear sightlines. Ergonomic positioning of controls and display screens.

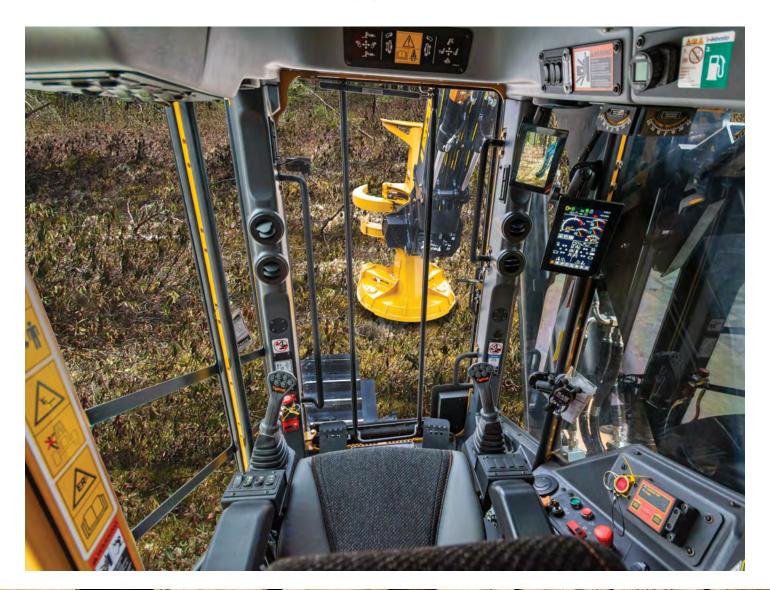

INCREASED BOOM ENVELOPE

The LX877 ER boom system provides increased envelope, tighter tuck and more below grade capability. Open-tip routing offers better protection of the hoses leading to the felling head. Three-mode ER provides the operator with a wide range of boom control options.





OPEN ACCESS

The side opening engine roof completely exposes the top and both sides of the engine, and most hydraulic components. When open, the enclosure roof serves as a spacious side service platform to work comfortably and safely.

DESIGNED FOR STEEP SLOPES

 Optimized weight distribution and low centre of mass, along with Tigercat's patented super duty leveling undercarriage, provide excellent stability on steep slopes. The unique sloping tail design increases leveling capability to 26 degrees. Additional clearance improves cable management on winch assist application, reducing chain rub and interference.



Tigercat^{*}

LX877 FELLER BUNCHER

| POWER: | 260 kW (350 hp) |
|--------------------|----------------------|
| CUT RADIUS: | 8,79 m (28 ft 10 in) |
| TAIL SWING RADIUS: | 3,08 m (10 ft 1 in) |





Scan the QR code then click 'SPECS' for a full list of machine specifications for the LX877 feller buncher.

Download the Tigercat App or visit tigercat.com to access the most current machine specifications for all Tigercat machine models.

| EMAIL | comments@tigercat.com |
|---------|---|
| PHONE | 519.753.2000 |
| WEBSITE | www.tigercat.com |
| ADDRESS | 54 Morton Ave. East, Brantford, Ontario Canada, N3R 7J7 |
| MAIL | Box 637 N3T 5P9 |

© 2001 - 2025 Tigercat International Inc. All Rights Reserved. TIGERCAT, WIDERANGE, TURNAROUND, ER, EHS, LOW-WIDE, TEC, REMOTELOG, LOGON, TCI, and their respective lagos, TOUGH RELIABLE PRODUCTIVE, TIGERCAT TV, "Tigercat Orange" and BETWEEN THE BRANCHES, as well as corporate and product identity, are trademarks of Tigercat International Inc., and may not be used without permission. TIGERCAT, TCI, TURNAROUND, WIDERANGE, EHS, LOW-WIDE, ER and REMOTELOG, and their respective lagos are registered trademarks of Tigercat International Inc.

CV1051 LX877 1.0 0125