610H CABLE SKIDDER



COMPACT CABLE SKIDDER FOR SELECTIVE FELLING.




WITH CLASS-LEADING OPERATOR VISIBILITY, SPEED, AGILITY AND POWER, THE 610H CABLE SKIDDER EXCELS IN TIGHT SPACES, SOFT SOIL CONDITIONS AND SELECTIVE LOGGING.

KEY BENEFITS

- Electronic controlled hydrostatic drive, fuel efficient and easy to operate
- Maximum tractive effort always available, high breakout performance, minimized wheel spin
- Long-life centre section constructed with thick steel plate, large diameter pins and tapered roller bearings
- Hydrostatic winch, variable line speed based on load size for increased productivity
- Exceptional weight distribution for optimal performance in soft soil conditions and uphill skidding

EXCELLENT OPERATOR COMFORT

The large, quiet cab features ergonomic control layout, climate control with numerous air vents and infinitely variable fan speed, and a hot and cold climate controlled cup holder. Dedicated storage locations have been added for a jacket, hard hat, and lunchbox. The 610H is fitted with a fixed position seat angled at 30 degrees.

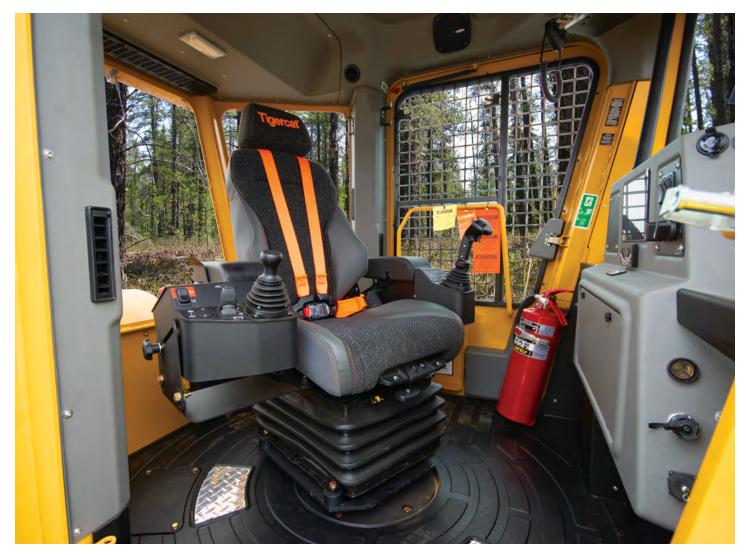

LONG-LIFE CENTRE SECTION

Tigercat's legendary centre section design uses a preloaded tapered roller bearing system along with thick steel plate and large diameter pins. The result is a low maintenance steering joint that lasts the life of the machine.



DURABLE TIGERCAT AXLES

The 610H uses oversize axles for long life, reliability and high uptime. Tigercat axles are built in-house to match the high performance characteristics of Tigercat skidders. The rear axle is well protected by the winch shield.




HIGH PERFORMANCE WINCH

Hydrostatic winch with variable piston motor offers higher line speeds for lighter loads, while maintaining peak (bare drum) line pull for heavy loads. A wet-disk dynamic clutch allows the operator to drop a load and drive away or reel in a load while driving. A mechanical jaw clutch allows for low free spool resistance.



Tigercat^{*}

610H CABLE SKIDDER

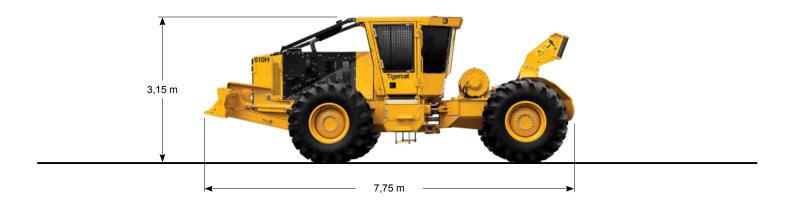



Scan the QR code then click 'SPECS' for a full list of machine specifications for the 610H cable skidder.

Download the Tigercat App or visit tigercat.com to access the most current machine specifications for all Tigercat machine models.

EMAIL	comments@tigercat.com
PHONE	519.753.2000
WEBSITE	www.tigercat.com
ADDRESS	54 Morton Ave. East, Brantford, Ontario Canada, N3R 7J7
MAIL	Box 637 N3T 5P9

© 2001 - 2025 Tigercat International Inc. All Rights Reserved. TIGERCAT, WIDERANGE, TURNAROUND, ER, EHS, LOW-WIDE, TEC, REMOTELOG, LOGON, TCI, and their respective logos, TOUGH RELIABLE PRODUCTIVE, TIGERCAT TV, "Tigercat Orange" and BETWEEN THE BRANCHES, as well as corporate and product identity, are trademarks of Tigercat International Inc., and may not be used without permission. TIGERCAT, TCI, TURNAROUND, WIDERANGE, EHS, LOW-WIDE, ER and REMOTELOG, and their respective logos are registered trademarks of Tigercat International Inc.

CV1049 610H 1.0 0125